



1 2 3 4 5 6 7

A

A

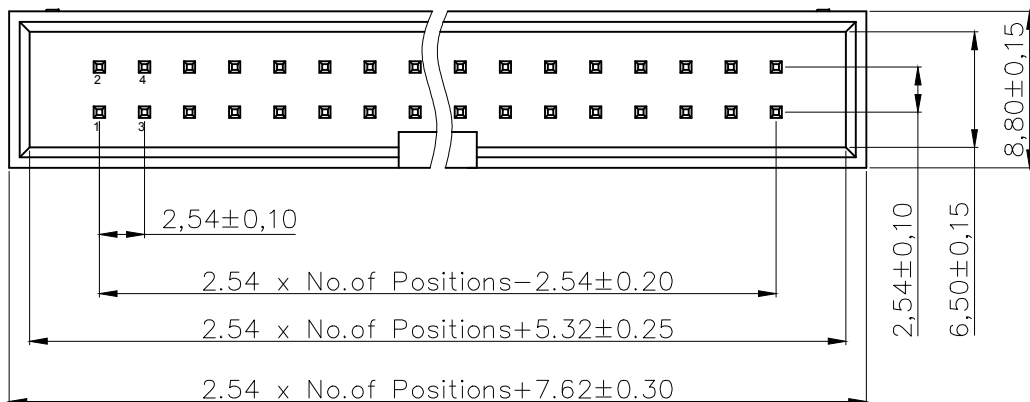

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

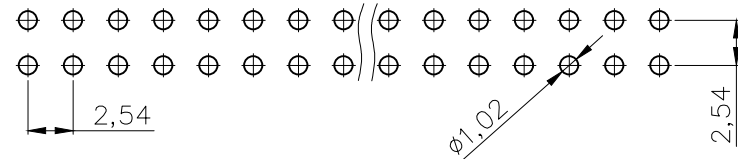

NOTES:

MATERIAL

- 1.Insulator Material: PBT+30%GF(UL94V-0),Grey
- 2.Contact Material : Brass
- 3.Contact Plating :
AWHW xxG-0202-T: Gold flash/Tin Over Ni
AWHW xxG-0102-T: 30u"Au/Tin Over Ni

ELECTRICAL

- 1.Current Rating: 3AMP\
- ⑤ 2.Voltage Rating: 250V
- 3.Withstand Voltage: 500V AC/Minute
- 4.Contact Resistance : 20mΩ max
- 5.Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

- 1.Operation Temperature: -40°C to +105°C
- 2.Packing: Tray packing

Order information:

xx : 06,08,10,12,14,16,18,20,24
26,30,34,40,50,60,64

B

B

C



C

D

D

E

E

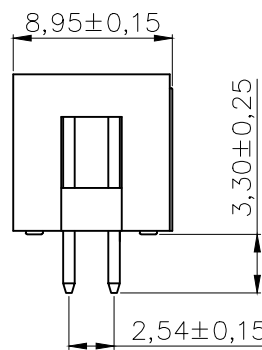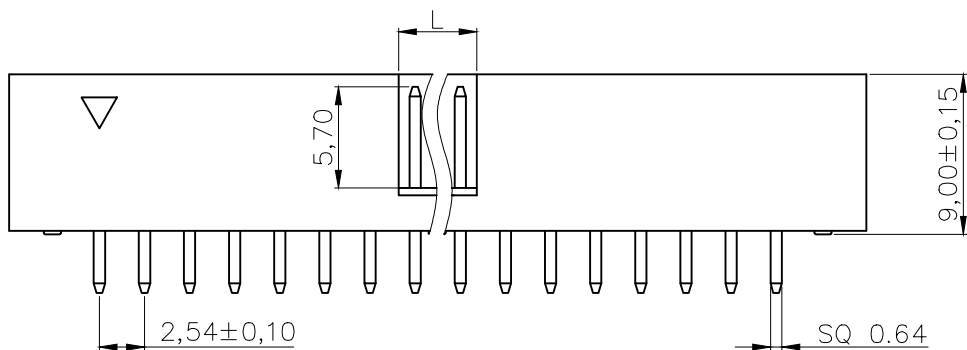

Dimension antitheses list	
NO. Pin	L
6P-8P	4.00
10P-64P	4.40

F

F

G

G

RoHS compliant
Unit: mm




Scale	Free	⑦	Add solder profile	10.03.2021	Daniel		Date	Name	Customer-No.
TOLERANCE		⑥	Cancel solder profile	12.10.2020	Daniel	Drawn	25.01.2006	Alex	ASSMANN WSW-No. AWHW xxG-0202-T AWHW xxG-0102-T
X.X	±0.40	⑤	Add voltage rating	09.07.2019	Xavier	Approved	10.03.2021	Daniel	
X.XX	±0.25	④	Add UL file no.	12.12.2013	Amy				
X.XXX	±0.15	③	Add the plating Au 30u"	23.10.2013	Winnie				Drawing-No. ASS 2314 CO rev07
DIM	TOL	②	Update	29.06.2009	Dean				
Angle	± 3°	Id.	Modification	Date	Name				Sheet 1/2

H

H

1 2 3 4 5 6 7

Solder profile:

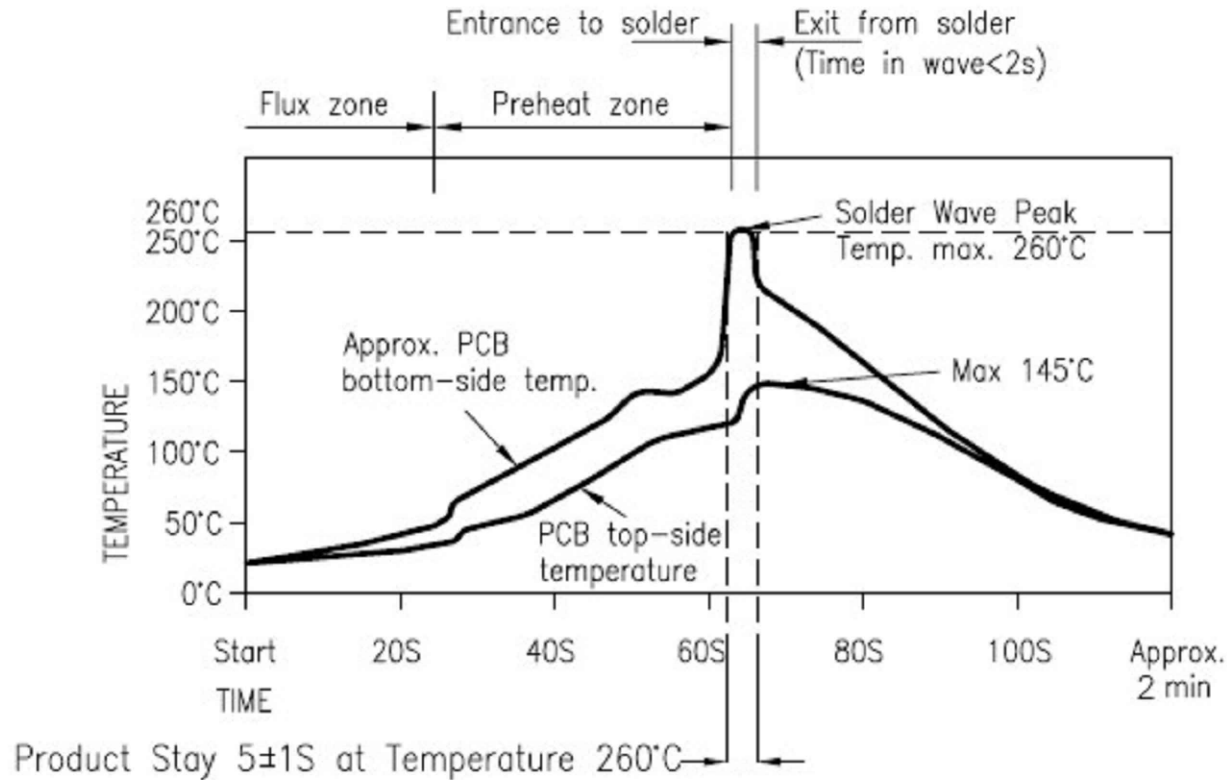

RoHS compliant
Unit: mm



Scale	Free	⑦	Add solder profile	10.03.2021	Daniel		Date	Name	Customer-No.		
TOLERANCE		⑥	Cancel solder profile	12.10.2020	Daniel	Drawn	25.01.2006	Alex	ASSMANN WSW-No. AWHW xxG-0202-T AWHW xxG-0102-T		
X.X	±0.40	⑤	Add voltage rating	09.07.2019	Xavier	Approved	10.03.2021	Daniel			
X.XX	±0.25	④	Add UL file no.	12.12.2013	Amy						
X.XXX	±0.15	③	Add the plating Au 30u"	23.10.2013	Winnie				Drawing-No.		
		②	Update	29.06.2009	Dean				ASS 2314 CO		rev07
		Id.	Modification	Date	Name				Replace	Sheet 2/2	



ASS 2314 CO rev07

Replace Sheet 2/2