


NOTE: Unless otherwise specified

1. All resistance values are in ohms, +/- 5%, 1/8 watt.
2. All capacitance values are in microfarads.
3. () denotes sheet to sheet references.
4. Cold & hot ground are connected together at two locations, near the ADB connectors and at the sound circuit.

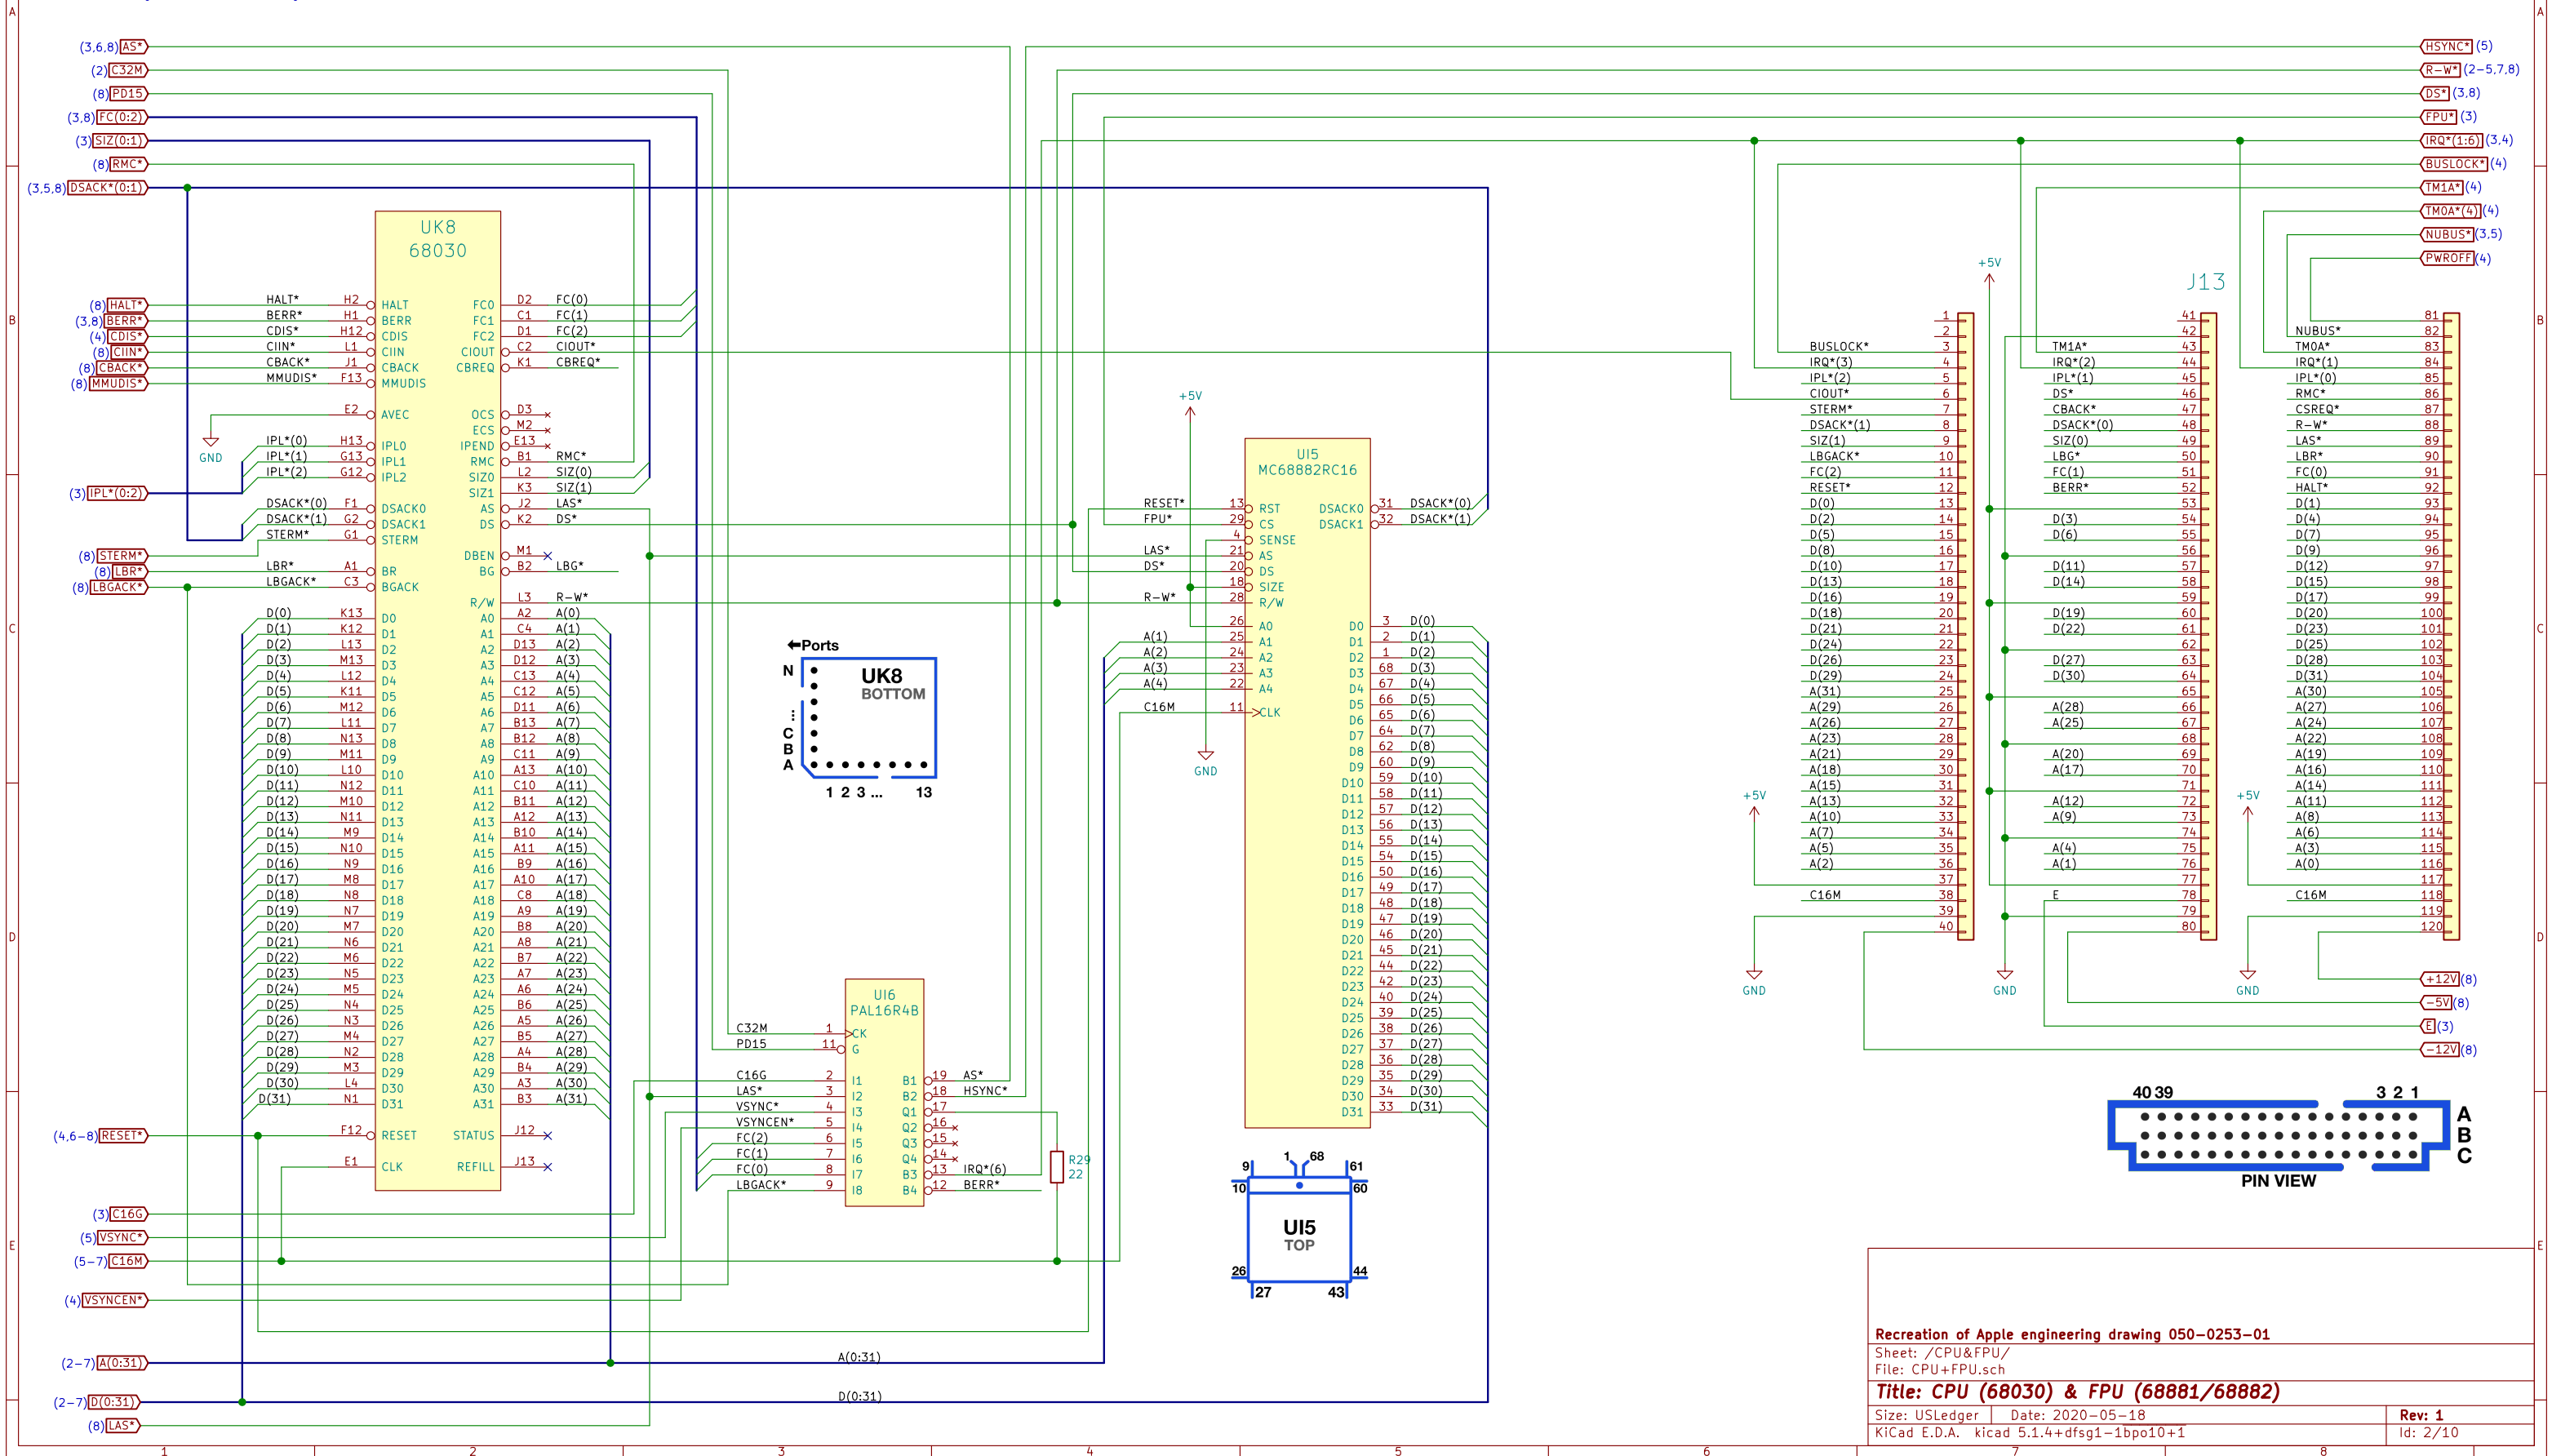

Recreation of Apple engineering drawing 050-0253-01

Sheet: /CPU&FPU/

File: CPU+FPU.sch

Title: CPU (68030) & FPU (68881/68882)

Size: USLedger Date: 2020-05-18

KiCad E.D.A. kicad 5.1.4+dfsg1-1bpo10+1

Rev: 1

Id: 2/10